

# TUF STUF™

HIGH PERFORMANCE FLOORING



NO WAX  
NO BUFF  
EASY TO  
CLEAN

T3™

COMMERCIAL LUXURY VINYL TILES



# THREE DISTINCT STYLES. ONE AMAZING PRODUCT.

With three beautiful categories, **TUF STUF™ T3™ Luxury Vinyl Tile** offers a wide variety of design options. The **TEXTURES** collection encompasses woods, marbles, slates and travertine. The **TEXTILES** collection has a soft textile look, but with the durability and performance of a hard surface. The **TECHNOLOGY** collection represents the latest advancements in modern day living, with patina metal and stained concrete designs. Mix and match all of our tiles with confidence thanks to our 23 mil. wear layer and 15-year warranty. For more information, contact your Teknoflor sales representative.



## DESIGN

- Offers a wide variety of innovative design options
- Three distinct design categories: **Textures. Textiles. Technology.**
- Mix and match with 36 unique tile colors
- Recipient of 2016 ADEX Silver Award for Design Excellence

## DURABLE AND LOW MAINTENANCE

- **No Wax, No Buff;** Easily cleaned by damp mopping or auto-scrubbing
- Embossed surface difficult to scuff or scratch
- Design friendly look with the durability of a hard surface product

## ENVIRONMENTALLY FRIENDLY

- TekDefend™ incorporated into the wear layer which effectively inhibits bacterial growth on the flooring surface
- No buff floors mean no bacteria, dust or wax particles are thrown into the air during cleaning
- No odors from floor finishes or strippers; no cleaning agents expelled into the environment

## SAFE

- ADA Compliant
- Meets fire test standards and is suitable for use in emergency exits and corridors

## DIMENSIONS

- 18" x 18" Tiles (33 colors) • 18" x 36" Tiles (3 colors)

## OVERALL THICKNESS

- 3mm with a 23 mil. wear layer

## WARRANTY

- 15-year commercial warranty

## APPLICATIONS

- Ideal for Healthcare, Senior Living, Retail, Corporate/Office, Hospitality, Academic and Educational Environments

**TEXTURES 18 x 18 / \*18 x 36**



TS3520 Mansion



TS3521 Pavilion



TS3522 Estate



TS3523 Palace




TS3524 Tower



TS3525 Cloister



TS3526 Chalet



TS3527 Castle



TS3528 Conservatory




TS3529 Villa




TS3530 Chateau



TS3531 Manor



TS3533 Cathedral



TS3534 Hermitage




TS3535 Sandcastle



TSW3501 Cottage




TSW3502 Bungalow



TSW3503 Ranch




TSW3504 Barn

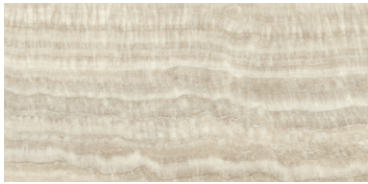

TS3517 Bathhouse\* (18x36)




TS3518 Palazzo\* (18x36)

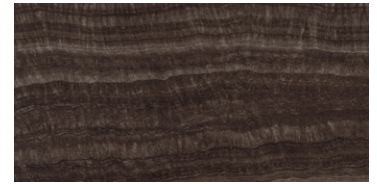


TS3519 Pantheon\* (18x36)


**TEXTILES 18 x 18**




TX3501 Headquarters



TX3502 Studio



TX3503 Spa



TX3504 Agency



TX3507 Atelier




TX3511 Boutique



TX3512 Tailor




TX3513 Gallery



TX3514 Resort


**TECHNOLOGY 18 x 18**




TY3508 Warehouse



TY3510 Penthouse



TY3515 Loft



TY3516 Factory



TY3532 Workshop

NOTE: Linear patterns may not align exactly. Printed swatch images are for reference only and may vary from actual tile color.



# TUF STUF™ T3™

COMMERCIAL LUXURY VINYL TILES

## TECHNICAL DATA

STANDARD SPECIFICATION	ASTM F1700
CLASSIFICATION	CLASS III Type B
DIMENSIONS	18" x 18" or 18" x 36" Tile (36 sf/carton)
OVERALL THICKNESS	3.0 mm Non-Cushioned
WEAR LAYER THICKNESS	23 mils (0.55 mm)
WEAR LAYER COMPOSITION	Virgin PVC wear layer infused with CS TUF STUF Ultimate Performance Technology

## FIRE SPECIFICATIONS

CRITICAL RADIANT FLUX	≥ 0.45 watts/cm <sup>2</sup> NFPA Class I
SMOKE GENERATION	< 450 DM Corrected Pass
FIRE TEST DATA	Complies with NFPA 101 Requirements

## PERFORMANCE SPECIFICATIONS

ASTM F1700	Standard Specification for Solid Vinyl Floor Tile Exceeds Requirements
CHEMICAL RESISTANCE	Meets Requirements
DIMENSIONAL STABILITY	Exceeds Requirements - Does not change linear dimension more than 0.020"/linear foot
FLEXIBILITY	Meets Requirements
SLIP RESISTANCE	≥ 0.6 SCOF Complies with ADA Guidelines
STATIC LOAD LIMIT	Exceeds Requirements 1,500 psi at maximum limit
CHAIR CASTOR RESISTANCE	Phillips Roll Chair 25,000 cycles Pass
CA 01350 EMISSIONS TESTING	Meets Requirements FloorScore® Certified SCS-FS-03430
	NOTE: Linear Patterns May Not Align Exactly



Schedule  
GS-27F-0504H • GS-27F-0036V  
GS-27F-0015V



TEKNOFLOR®